


GRADE 3-Residential Series

Deadbolts-Single & Double Cylinder

- Adjustable door thickness 1 3/8" to 2"
- Four-way bolt 2 3/8 - 2 3/4 and drive in
- Fits 1 1/2" to 2 1/8" hole diameter
- Brass 1" throw bolt
- Hardened pin insert & free turning guard
- 5 pin cylinder

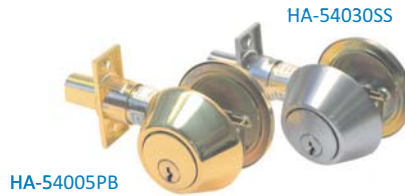

HA-54005PB

- 4 finishes available: polished brass, antique brass, antique bronze, stainless steel
- Rose diameter 2 1/2"
- WR5 keyway, keyed different
- Limited 25 year mechanical warranty

Part #	Description	Finish
HA-54005PB	single cylinder, adjustable backset	polished brass,
HA-54009AB	single cylinder, adjustable backset	antique brass
HA-54013ABR	single cylinder, adjustable backset	antique bronze
HA-54030SS	single cylinder, adjustable backset	stainless steel
HA-53005PB	double cylinder, adjustable backset	polished brass
HA-53009AB	double cylinder, adjustable backset	antique brass
HA-53013ABR	double cylinder, adjustable backset	antique bronze
HA-53030SS	double cylinder, adjustable backset	stainless steel
HA-54000AB	bolt only	antique brass
HA-54000ABR	bolt only	antique bronze
HA-54000PB	bolt only	polished brass
HA-54000SS	bolt only	stainless steel
HA-54000-4modeAB	4 way bolt only	antique brass
HA-54000-4modeABR	4 way bolt only	antique bronze
HA-54000-4modePB	4 way bolt only	polished brass
HA-54000-4modeSS	4 way bolt only	stainless steel



GRADE 3-T 100 Series

Deadbolts-Single & Double Cylinder

- Adjustable door thickness 1 3/8" to 1 3/4"
- UL/cUL listed
- Adjustable 2 3/8" and 2 3/4" backset bolt
- Fits 1 1/2" to 2 1/8" hole diameter
- 1" throw, with a concealed hardened pin steel roller to prevent cutting or sawing



- Solid brass 5 (drilled for 6) pin cylinder for added protection & durability
- Solid steel door frame strike plate, reinforced with 3" screws for protection against kick in attacks
- Rose diameter 2 1/2"
- SCI & WR5 keyways, keyed different
- Limited 25 year mechanical warranty

Part #	Description	Finish
HA-T160-SC-US3-UL	single cylinder, adjustable backset	polished brass
HA-T160-SC-US32D-UL	single cylinder, adjustable backset	stainless steel
HA-T160-WR-US3-UL	single cylinder, adjustable backset	polished brass
HA-T160-WR-US32D-UL	single cylinder, adjustable backset	stainless steel
HA-T162-SC-US3-UL	double cylinder, adjustable backset	polished brass
HA-T162-SC-US32D-UL	double cylinder, adjustable backset	stainless steel
HA-T162-WR-US3-UL	double cylinder, adjustable backset	polished brass
HA-T162-WR-US32D-UL	double cylinder, adjustable backset	stainless steel
HA-T1000-32D	bolt only 2 3/8" to 2 3/4" backset	stainless steel
HA-T1000-US3	bolt only 2 3/8" to 2 3/4" backset	polished brass



HA-T1000-32D

*WR = 6 pin, keyed 5 WR5 keyway *SC = 6 pin, "C" keyway